



Electrical Information			
Model No.	CP05-75	CP05-100	CP05-120
Power Consumption(±5%)	75W	100W	120W
Power Supply	DONE		
Input Voltage	120-277VAC / 50 / 60 Hz		
Power Factor	>0.9		
Surge Protection	6kV line-line, 10kV line-earth		
Driver Type	Constant Current (CC)		
Control	0-10V		

Optic Information			
LED Type	LED 2835		
Luminous Flux (±10%)	11250lm	15000m	18000lm
Efficacy(4000K Ra70)	150lm/w		
Correlated Color Temperature	4000K (3000K/5000K optional)		
Color Rendering Index	Ra70 (Ra80 optional)		
Beam Angle	120°(U00A01)		
UGR level	N/A		

Dimensions and Mount	
Product Dimension	369.5x368.5x65mm(14.55"x14.51"x2.56")
Luminaire Net Weight	3.9±0.3kg(8.60±0.66Lbs)
Export Carton Size	390x390x90mm(15.35"x15.35"x3.54")
Gross Weight	4.63±0.3kg(8.81±0.66Lbs)
Mounting Option	Surface mount
	Surface mount with adapter plate
	G 3/4 conduit mount
Material	ADC12
	Tempered Glass
Finish	Powder Coating
Fixture Color	White(RAL9016)
EPA	NA
IK Rating	IK08
IP Rating	IP65
Category of corrosion	C3

Lifespan and Warranty	
Operating Temperature	-30°C to + 50°C(-22°F to+122°F)
	45000hrs-L90
Life Time of LED @Ta=25°C	93000hrs-L80
	148000hrs-L70
	5 years

New Features

The power could be set to 30%, 50%, 75% and 100%.
 The CCT could be set to Cool White, Natural White and Warm White.
 Please select a suitable Power and CCT by the switch.

* Please consult us for details.

Description

Versa canopy light is a great choice for gas stations. This light is a cost-effective lighting solution with a simple yet stylish design. Its aluminum die-casting heat sink is lightweight and provides excellent thermal performance. The built-in switch allows for 3 CCT and 4 Wattage levels to be selected, providing flexibility.

Key Features


- Full wattage 75W, 100W, 120W
- High light efficacy 150lm/W
- 3 CCT & 4 wattage adjustable available
- Multiple installations: surface mount, G 3/4 conduit mount and mount with adapter plate
- IP65&IK08

Applications

- Gas station
- Underground parking lot
- Warehouse
- Industrial facility
- Exhibition center
- Shopping mall
- Toll station


* Lumen output and light distribution are only for reference. Not all product variations listed on this page are DLC Standard/Premium qualified. Visit www.designlights.org/search to confirm qualification.

Photometry




S00A01


Mounting Options

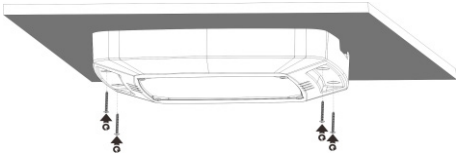

Surface mount

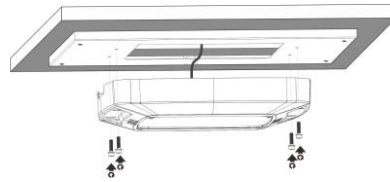


Surface mount with adapter plate



G 3/4 conduit mount


Dimensions

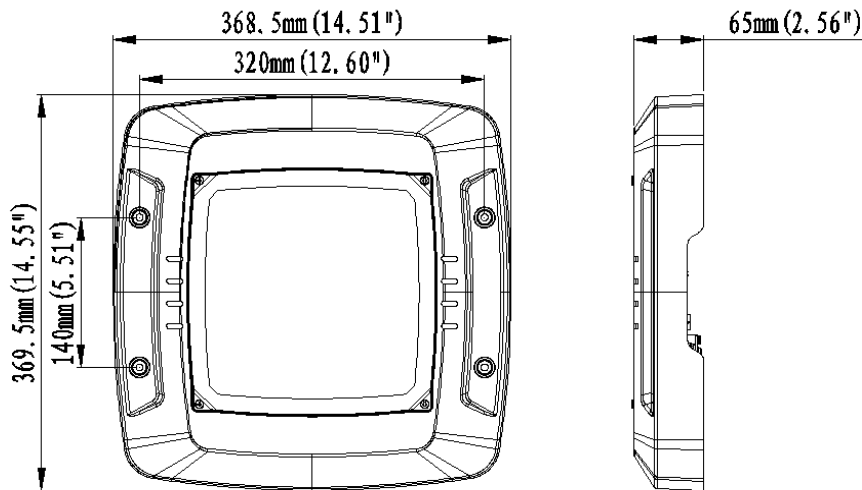

Accessories



G 3/4 adapter plate
SPCC materials with outdoor powder coating



Ceiling mount adaptor
SPCC materials with outdoor powder coating



PIR sensor



Microwave motion sensor